

260W-275W

60 efficient polycrystalline silicon cell modules

SLP260-20 SLP265-20 SLP270-20 SLP275-20

Electric Performance Parameters

TYPE	SLP260-20	SLP265-20	SLP270-20	SLP275-20
Rated power (W)	260W	265W	270W	275W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	30.70V	30.99V	31.14V	31.32V
Optimum operating current (Imp)	8.47A	8.53A	8.67A	8.78A
Open-circuit voltage (Voc)	37.57V	37.94V	38.12V	38.34V
Short-circuit current (Isc)	9.01A	9.10A	9.22A	9.32A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C			
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C			
Temperature coefficient of rated power	-(0.5±0.05)%/°C			
Standard operating temperature	45±2°C			

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5

NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s



Packaging Information

Type of Cell	Polycrystalline silicon cell (156.75x156.75)
Cell Array	60(6x10)
Module Dimension	1640mm x 992mm x 40mm
Weight	18.2kg
Pallet Dimension	1686mm x 1145mm x 1120mm(26 pieces/pallet)
Container loading information (40HQ)	728片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft2)
Maximum back load	2400Pa (50 lb/ft2)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

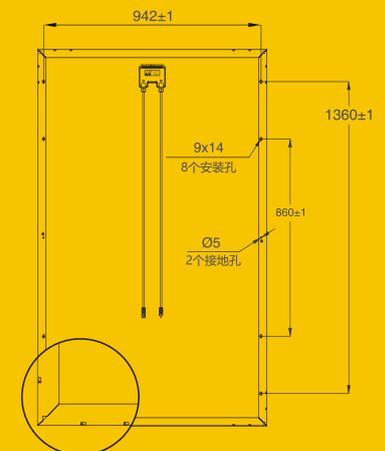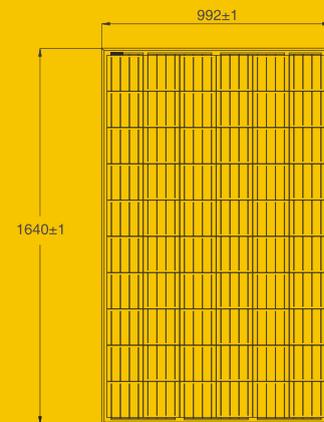

Certificates of TUV, CQC, CGC, JET, CE and CSA

315W-330W

72 efficient polycrystalline silicon cell modules

SLP315-24 SLP320-24 SLP325-24 SLP330-24

Electric Performance Parameters

TYPE	SLP315-24	SLP320-24	SLP325-24	SLP330-24
Rated power (W)	315W	320W	325W	330W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	37.02V	37.21V	37.31V	37.41V
Optimum operating current (Imp)	8.51A	8.60A	8.71A	9.84A
Open-circuit voltage (Voc)	45.31V	45.54V	45.67V	45.71V
Short-circuit current (Isc)	9.05A	9.15A	9.27A	9.32A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C			
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C			
Temperature coefficient of rated power	-(0.5±0.05)%/°C			
Standard operating temperature	45±2°C			

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5
NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s



Packaging Information

Type of Cell	Polycrystalline silicon cell (156.75x156.75)
Cell Array	72(6x12)
Module Dimension	1956mm x 992mm x 40mm
Weight	26.0kg
Pallet Dimension	2040mm x 1145mm x 1120mm(26 pieces/pallet)
Container loading information (40HQ)	616片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

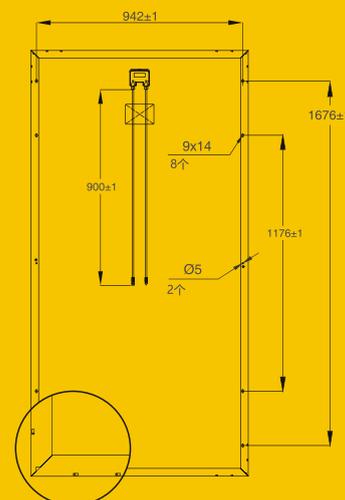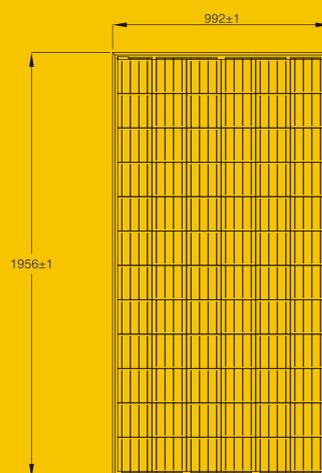

Certificates of TUV, CQC, CGC, JET, CE and CSA

315W-330W

72 efficient polycrystalline silicon cell modules

SLP315-24 SLP320-24 SLP325-24 SLP330-24

Electric Performance Parameters

TYPE	SLP315-24	SLP320-24	SLP325-24	SLP330-24
Rated power (W)	315W	320W	325W	330W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	37.02V	37.21V	37.31V	37.41V
Optimum operating current (Imp)	8.51A	8.60A	8.71A	9.84A
Open-circuit voltage (Voc)	45.31V	45.54V	45.67V	45.71V
Short-circuit current (Isc)	9.05A	9.15A	9.27A	9.32A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C			
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C			
Temperature coefficient of rated power	-(0.5±0.05)%/°C			
Standard operating temperature	45±2°C			

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5

NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s



Packaging Information

Type of Cell	Polycrystalline silicon cell (156.75x156.75)
Cell Array	72(6x12)
Module Dimension	1956mm x 992mm x 40mm
Weight	26.0kg
Pallet Dimension	2040mm x 1145mm x 1120mm(26 pieces/pallet)
Container loading information (40HQ)	616片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

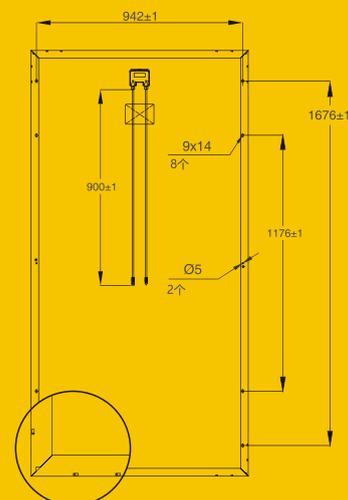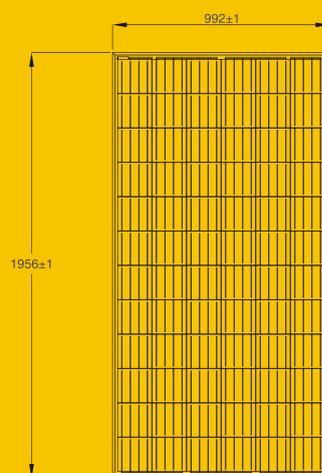

Certificates of TUV, CQC, CGC, JET, CE and CSA

330W-340W
72 efficient monocrystalline silicon cell modules

SLP330S-24 SLP335S-24 SLP340S-24

Electric Performance Parameters

TYPE	SLP330S-24	SLP335S-24	SLP340S-24
Rated power (W)	330W	335W	340W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	37.63V	37.81V	38.12V
Optimum operating current (Imp)	8.77A	8.86A	8.92A
Open-circuit voltage (Voc)	45.91V	46.13V	46.50V
Short-circuit current (Isc)	9.22A	9.31A	9.37A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C		
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C		
Temperature coefficient of rated power	-(0.5±0.05)%/°C		
Standard operating temperature	45±2°C		

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5

NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s


Packaging Information

Type of Cell	monocrystalline silicon cell (156.75x156.75)
Cell Array	72(6x12)
Module Dimension	1956mm x 992mm x 40mm
Weight	25.0kg
Pallet Dimension	2040mm x 1145mm x 1120mm(26 pieces/pallet)
Container loading information (40HQ)	616片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

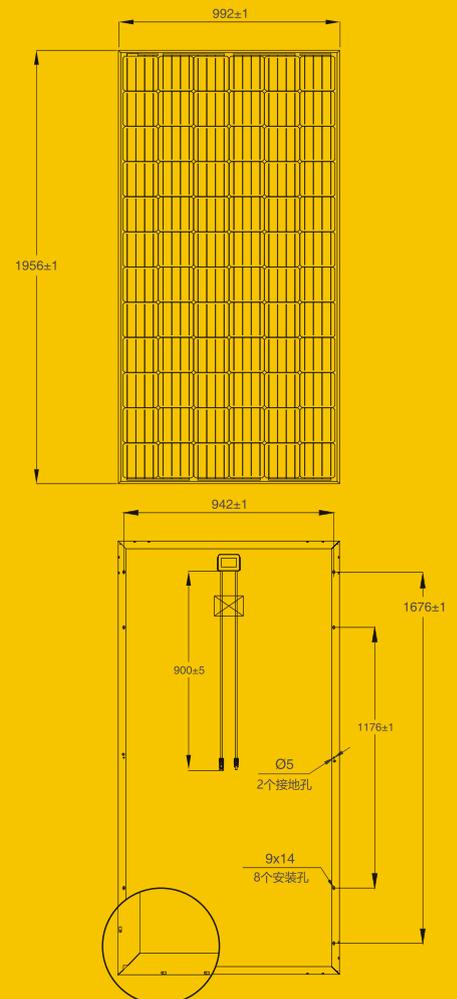

Certificates of TUV, CQC, CGC, JET, CE and CSA



SLP275-20 SLP280-20 SLP285-20 SLP290-20

Electric Performance Parameters

TYPE	SLP275-20	SLP280-20	SLP285-20	SLP290-20
Rated power (W)	275W	280W	285W	290W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	31.32V	31.52V	31.64V	31.73V
Optimum operating current (Imp)	8.78A	8.91A	9.05A	9.17A
Open-circuit voltage (Voc)	38.34V	38.52V	38.61V	38.72V
Short-circuit current (Isc)	9.32A	9.40A	9.48A	9.55A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C			
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C			
Temperature coefficient of rated power	-(0.5±0.05)%/°C			
Standard operating temperature	45±2°C			

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5
NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s



Packaging Information

Type of Cell	Polycrystalline silicon cell (156.75x156.75)
Cell Array	60(6x10)
Module Dimension	1640mm x 992mm x 40mm
Weight	18.2kg
Pallet Dimension	1686mm x 1145mm x 1120mm(26pieces/pallet)
Container loading information (40HQ)	728片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

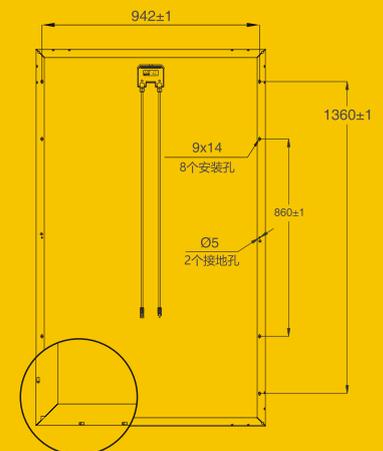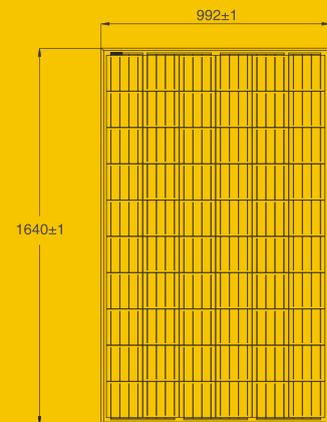

Certificates of TUV, CQC, CGC, JET, CE and CSA

PERC

335W-350W

72 efficient polycrystalline silicon cell modules

SLP335-24 SLP340-24 SLP345-24 SLP350-24

Electric Performance Parameters

TYPE	SLP335-24	SLP340-24	SLP345-24	SLP350-24
Rated power (W)	335W	340W	345W	350W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	37.81V	37.92V	37.98V	38.05V
Optimum operating current (Imp)	8.86A	8.97A	9.11A	9.22A
Open-circuit voltage (Voc)	45.73V	45.82V	45.93V	46.02V
Short-circuit current (Isc)	9.32A	9.38A	9.45A	9.54A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C			
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C			
Temperature coefficient of rated power	-(0.5±0.05)%/°C			
Standard operating temperature	45±2°C			

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5

NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s



Packaging Information

Type of Cell	Polycrystalline silicon cell (156.75x156.75)
Cell Array	72(6x12)
Module Dimension	1956mm x 992mm x 40mm
Weight	26.0kg
Pallet Dimension	2040mm x 1145mm x 1120mm(26pieces/pallet)
Container loading information (40HQ)	616片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

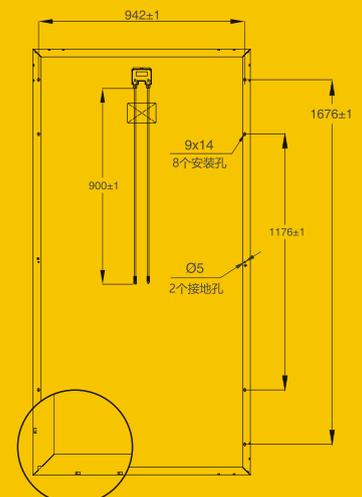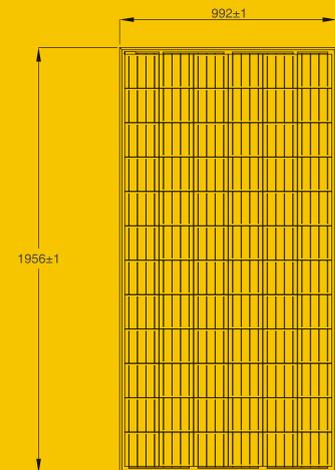



290W-300W
60 efficient monocrystalline silicon cell modules

SLP290S-20 SLP295S-20 SLP300S-20

Electric Performance Parameters

TYPE	SLP290S-20	SLP295S-20	SLP300S-20
Rated power (W)	290W	295W	300W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	32.01V	32.14V	32.28V
Optimum operating current (Imp)	9.06A	9.18A	9.30A
Open-circuit voltage (Voc)	39.05V	39.20V	39.35V
Short-circuit current (Isc)	9.52A	9.65A	9.77A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C		
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C		
Temperature coefficient of rated power	-(0.5±0.05)%/°C		
Standard operating temperature	45±2°C		

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5

NOCT: illumination intensity: 800W/M², environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s



Packaging Information

Type of Cell	monocrystalline silicon cell (156.75x156.75)
Cell Array	60(6x10)
Module Dimension	1640mm x 992mm x 40mm
Weight	18.2kg
Pallet Dimension	1686mm x 1145mm x 1120mm(26pieces/pallet)
Container loading information (40HQ)	728片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

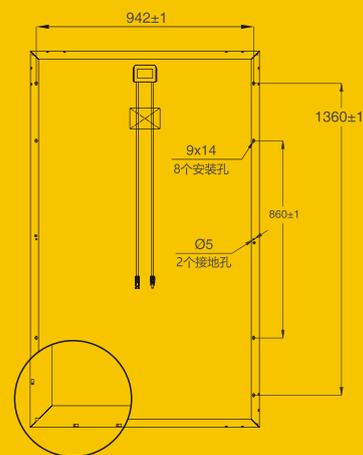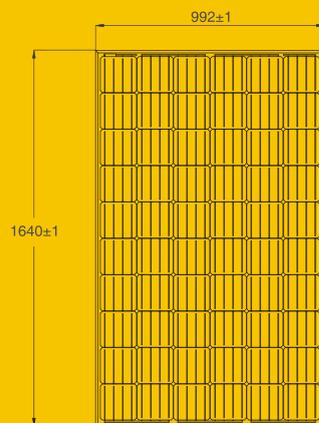

PERC

345W-360W

72 efficient monocrystalline silicon cell modules

SLP345S-24 SLP350S-24 SLP355S-24 SLP360S-24

Electric Performance Parameters

TYPE	SLP345S-24	SLP350S-24	SLP355S-24	SLP360S-24
Rated power (W)	345W	350W	355W	360W
Deviation of rated power (W)	0~+5W	0~+5W	0~+5W	0~+5W
Optimum operating voltage (Vmp)	38.21V	38.46V	38.71V	38.93V
Optimum operating current (Imp)	9.03A	9.10A	9.17A	9.25A
Open-circuit voltage (Voc)	46.61V	46.92V	47.18V	47.46V
Short-circuit current (Isc)	9.49A	9.56A	9.64A	9.72A
Temperature coefficient of open-circuit voltage	-(80±10)mV/°C			
Temperature coefficient of short-circuit current	(0.065±0.015)%/°C			
Temperature coefficient of rated power	-(0.5±0.05)%/°C			
Standard operating temperature	45±2°C			

STC: illumination intensity: 1000W/M², battery temperature: 25°C, air quality=1.5

NOCT: illumination intensity: 800W/M² environmental temperature: 20°C, air quality=1.5, wind speed: 1m/s


Packaging Information

Type of Cell	monocrystalline silicon cell (156.75x156.75)
Cell Array	72(6x12)
Module Dimension	1956mm x 992mm x 40mm
Weight	25.0kg
Pallet Dimension	2040mm x 1145mm x 1120mm(26 pieces/pallet)
Container loading information (40HQ)	616片

Operation Condition

Maximum system voltage	1000V
Rated current of serial fuse	15A
Maximum front load	5400Pa (112 lb/ft ²)
Maximum back load	2400Pa (50 lb/ft ²)
Operating temperature range	-40~+85°C
Module Standard	A

Module Dimension: (unit: mm)

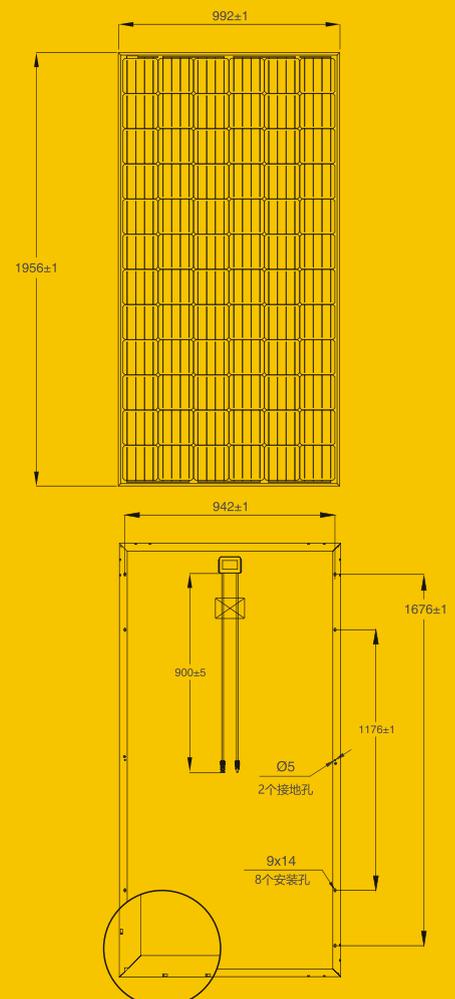

Certificates of TUV, CQC, CGC, JET, CE and CSA